
## **INSTALLATION NOTES:**

- 1. FOOTING MATERIALS & INSTALLATION BY OTHERS. TOOLS BY OTHERS.
- 2. BOLTS PROVIDED.
- 3. CHOOSE DIRECTION WAYNE TYLER LOGO ON BOLLARD WALL SHOULD FACE. CAST-IN OR CORE DRILL (4) 1-1/2"DIA.  $\times$  5"DEEP GROUT POCKETS INTO FOOTING PER ANCHOR BOLT PATTERN.
- 4. TAKE (4) 1/2" DIA. x 4-1/2" LONG ANCHOR BOLTS AND SCREW AN INCH DEEP INTO (4) 1/2"DIA. S.S. THREADED INSERTS, LEAVING 3-1/2" OF THE ANCHOR BOLT EXPOSED.
- 5. FILL ALL GROUT POCKETS WITH NON-SHRINK GROUT. INSERT BOLLARD WITH ANCHOR BOLTS INTO GROUT POCKETS.

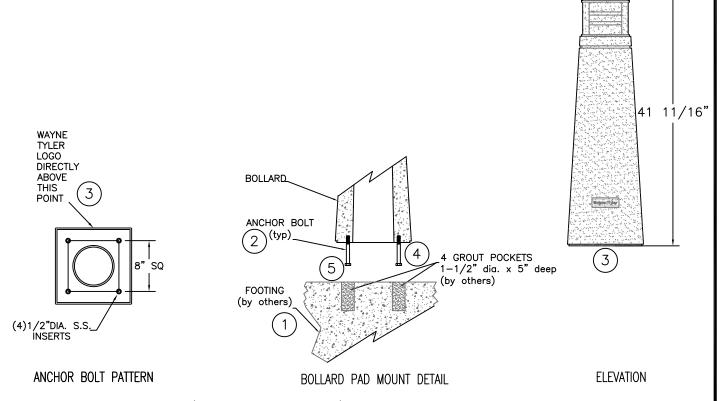

MOUNTING AND INSTALLATION INSTRUCTION SUBJECT TO CHANGE/UPDATE. SEEK THE MOST RECENT VERSION. 6/2017

Wayne : : Tyler	PLAN TYPE:	MOUNTING AND INSTALLATION	DATE: 06/01/17	FILE NO. 110TNL	SHEET 1
	PRODUCT:	110TNL-NON-LIT CONCRETE BOLLARD	scale: AS NOTED	drawn by: BGH	OF
	PAD MOUNT			1	